

# SILENT FLOOR BYTUM

RESILIENT UNDERSCREED MEMBRANE MADE OF BITUMEN AND POLYESTER FELT

## TESTED EFFECTIVENESS

The special structure absorbs vibrations from impact noise up to 20 dB.

## STRUCTURAL RESTORATION

The material and special structure of the product make it extremely safe even in applications in historic or valuable buildings, as it prevents the screed from percolating in applications with timber and concrete connectors.

## HERMETIC

Thanks to the bituminous mixture the membrane tends to close around the fastening system, ensuring watertightness.

## COMPOSITION

elastoplastomeric bitumen waterproofing membrane

polyester fibre felt made from post-consumer waste



## CODES AND DIMENSIONS

CODE	H <sup>(1)</sup> [m]	L [m]	thickness [mm]	A <sub>f</sub> <sup>(2)</sup> [m <sup>2</sup> ]	H <sup>(1)</sup> [ft]	L [ft]	thickness [in]	A <sub>f</sub> <sup>(2)</sup> [ft <sup>2</sup> ]	
SILFLOORBYT5	1,05	10	5	10	3' 5 3/8"	32' 9 3/4"	0.20	108	20

<sup>(1)</sup>1 m bituminous membrane with felt + 0.05 m bitumen membrane for overlap (3' 3 3/8" + 2").

<sup>(2)</sup>Without considering the overlap area.



## DURABLE

Stable over time, thanks to the bituminous mixture. Also highly compatible with fresh concrete.

## TIMBER-TO-CONCRETE

Ideal in combination with CTC connectors. Stiffness values also calculated in the presence of vapour barrier sheet or soundproofing layer.

## TECHNICAL DATA

Properties	standard	value	USC conversion
Thickness	-	approx. 5 mm <sup>(1)</sup>	0.20 inch
Surface mass m	-	1,5 kg/m <sup>2</sup>	0.30 lb/sft
Density ρ	-	300 kg/m <sup>2</sup>	18.7 lb/ft <sup>3</sup>
Resistance to airflow r	ISO 9053	> 100,0 kPa·s·m <sup>-2</sup>	-
Apparent dynamic stiffness s' <sub>t</sub>	EN 29052-1	7 MN/m <sup>3</sup>	-
Double layer apparent dynamic stiffness <sup>(2)</sup> s' <sub>t</sub>	EN 29052-1	4 MN/m <sup>3</sup>	-
Dynamic stiffness s'	EN 29052-1	27 MN/m <sup>3</sup>	-
Double layer dynamic stiffness <sup>(2)</sup> s'	EN 29052-1	14,5 MN/m <sup>3</sup>	-
Compressibility class	EN 12431	CP2 ( $\leq$ 2 mm)	approx. 0.17 US perm
Double layer compressibility class <sup>(2)</sup>	EN 12431	CP3 ( $\leq$ 3 mm)	-
CREEP Viscous sliding under compression X <sub>ct</sub> (2 kPa)	EN 1606	$\leq$ 1 mm	-
CREEP Viscous sliding under compression double layer(2) X <sub>ct</sub> (2 kPa)	EN 1606	$\leq$ 1 mm	-
Theoretical estimate of the impact sound pressure level attenuation ΔL <sub>w</sub> <sup>(3)</sup>	ISO 12354-2	27,7 dB	-
System resonance frequency f <sub>0</sub> <sup>(4)</sup>	ISO 12354-2	74,4 Hz	-
Impact sound pressure level attenuation ΔL <sub>w</sub> <sup>(5)</sup>	ISO 10140-3	20 dB	-
Impact sound pressure level attenuation ΔL <sub>w</sub> <sup>(5)</sup> double layer <sup>(2)</sup>	ISO 10140-3	21 dB	-
Thermal resistance R <sub>t</sub>	ISO 6946	0,13 m <sup>2</sup> K/W	-
Thermal conductivity λ	-	0,045 W/m·K 0,17 W/m·K	0.026 BTU/(h·ft <sup>2</sup> ·°F) 0.098 BTU/(h·ft <sup>2</sup> ·°F)
Specific heat c	-	1,3 kJ/kg·K	0.31 BTU/(lb·°F)
Water vapour resistance factor μ	EN 12086	100000	2500 MN·s/g
Water vapour transmission S <sub>d</sub>	-	> 100 m	< 0.035 US perm


<sup>(1)</sup>2 mm bituminous membrane + 3 mm felt (0.08 in + 0.12 in). | <sup>(2)</sup>With opposing white felts. | <sup>(3)</sup> $\Delta L_w = (13 \lg(m')) - (14,2 \lg(s')) + 20,8$  [dB] with m' = 125 kg/m<sup>2</sup> (25.60 lb/sft). |

<sup>(4)</sup>f<sub>0</sub> = 160  $\sqrt{s'/m}$  with m' = 125 kg/m<sup>2</sup> (25.60 lb/sft). | <sup>(5)</sup>Measured in the laboratory on 200 mm (7 7/8") CLT floor. See the manual for more information on configuration.

## SOUND REDUCTION INDEX LEVEL AND IMPACT NOISE LEVEL MEASUREMENTS

Tests carried out in the **Akustik Center Austria** laboratories of the **Holzforschung Austria** association in accordance with EN ISO 10140-2 and EN ISO 10140-3 made it possible to measure the soundproofing and impact noise level of the construction assembly described below:

- ① concrete screed (s: 60 mm - 2.4 in)
- ② BARRIER 100
- ③ mineral wool insulation (s: 30 mm - 1.2 in)
- ④ compacted gravel fill with cement (s: 80 mm - 3.2 in)
- ⑤ **SILENT FLOOR BYTUM** (s: 5 mm - 0.2 in)
- ⑥ CLT (s: 160 mm - 6.4 in)
- ⑦ metal structure for plasterboard
- ⑧ air chamber (s: 10 mm - 0.39 in)
- ⑨ low density mineral wool insulation (s: 50 mm - 2.0 in)
- ⑩ 2 plasterboard panels (s: 25 mm - 1.0 in)

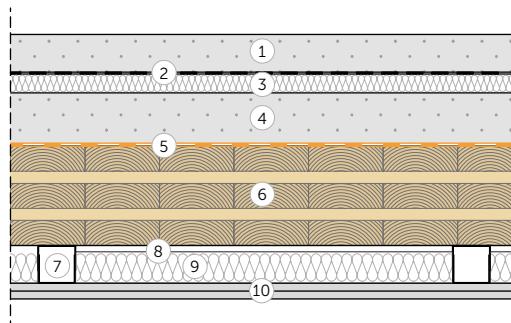

graphs and frequency values available

$$L_{n,w}(Cl) = \text{42 (0) dB}$$

$$IIC_{ASTM} = \text{42}$$

$$R_w(C; C_{tr}) = \text{60 (-1;-4) dB}$$

$$STC_{ASTM} = \text{59}$$

See the manual for more information on configuration.

Use the QR-code to download the complete manual!

[www.rothoblaas.com](http://www.rothoblaas.com)

